



Type No.	98.00809		
Electrical			
Port	Port1	Port2	Port3
Frequency (MHz)	800-960	1710-1880	1920-2170
Insertion Loss (dB)	≤ 0.5		
Isolation (dB)	≥ 80		
VSWR	≤ 1.3:1		
Impedance	50 Ω		
Input Power (c.w./per	≤ 300 Watts		
Intermodulation Products	≤ -150 dBc (3 rd order with 2×20W)		
Environmental			
Temperature Range	-20 to +55°C (Operating)		
Humidity	95% max, non condensing		
Application	Indoor, IP40		
Mechanical			
Connectors	N female		
Colors	Black (Painting)		
Weight	≤ 1.2 kg		
Dimensions (without connectors)	170*152*35.5 mm		
Packing	1 pc/box		

Schematic diagram

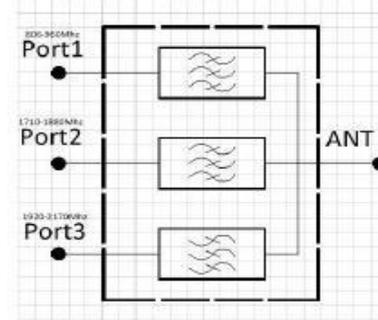

Outline drawing

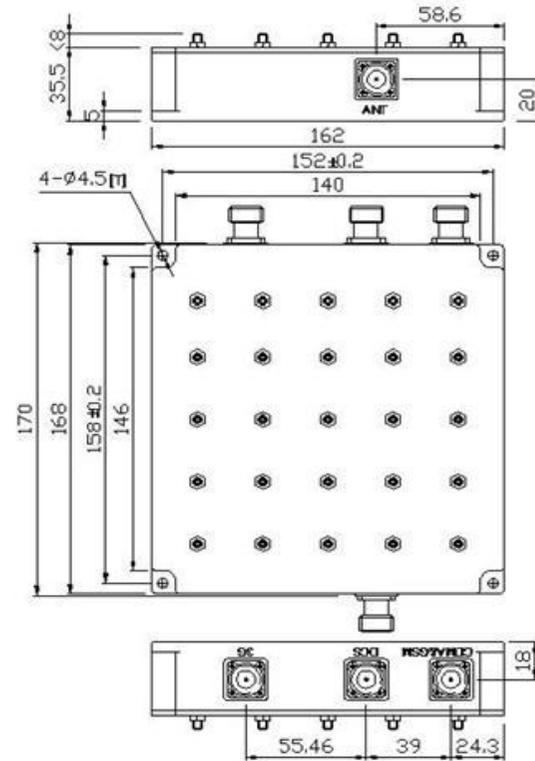

Product picture

